



Features

- 15" All-in-One panel PC POS terminal with bezel-free touch display.
- Energy-efficient & powerful Intel® 7th Gen. Core iprocessors.
- Durable operation with fanless design.
- Water & dust-proof front panel protection rated IP64.
- USB ports on both sides of the screen for peripheral connections.
- Easy access hard drive tray for installation.
- Optional VFD & 9.7" customer display, 2D barcode scanner, MSR, iButton, WiFi.
- Various stands selection for versatile applications.

SPECIFICATION


Model			PT2500	
Display	LCD Display Size		15" eDP Panel	
	Max. Resolution		1024 X 768	
	Brightness /Support Color		350 cd/m ² , 16.7M colors	
Touch Panel		Type	5-wire analog Resistiveor Projected Capacitive touch	
Processor	CPU/ Chipset		Intel® Celeron3965U (Dual Core 2MB Cache, up to 2.20GHz) MOQ required	
			Intel® Core™ i3-7100U (Dual Core 3M Cache, up to 2.40 GHz)	
			Intel® Core™ i5-7200U (Dual Core 3M Cache, up to 3.10 GHz)	
			Intel® Core™ i7-7500U (Dual Core 4M Cache, up to 3.50 GHz)	
Memory			X 1(DDR4-2133MHz SO-DIMM, up to 16GB)	
Storage			X 1 (2.5" SATAIII SSD)	
I/O Connectors	DC in		Lockable 3-pin DC 19V	
	USB 2.0		x 2 (rear), x 2 (side)	
	USB 3.0		x 4 (rear)	
	Powered COM (RS232)		X 3 (DB9 Power COM RI/ 5V/ 12V selected by jumper)	
	Cash Drawer Port		x 1 (24V RJ11)	
	VGA		x 1 (DB15)	
	Audio	Internal Speaker	1 x 2W	
	LAN		x 1 (RJ45 10/100/1000 Base-T)	
Optional Peripherals			VFD / 9.7" customer display / MSR / iButton / 2D barcode scanner/ WiFi	
Power Supply			90W DC 19V 3-pin power adapter	
OS Support			Linux / Win 10 IoT Enterprise	
Environment	Temperature	Operation	32° to 95° F (0° to 35° C)	
		Storage	-4° to 140° F (-20° to 60° C)	
	Relative Humidity		20% to 80% non-condensing	
Dimension (W x H x D)			Panel PC: 364 x 281 x 48.6 mm w/ PT2000 Stand: 364 x 339 x 229 mm	

ZP-PT2500

Energy-EfficientCore iPOS Terminal



Aluminum die-casting chassis fanless design

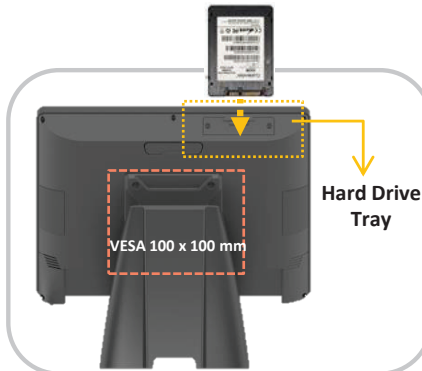


Easy access hard drive tray
Support VESA mounting



Selectable foot stands include A, PT2000 and Y stand with compact and sleek design; C Stand with a foldable base (MOQ required)



IP64 rated front panel
water and dust proof

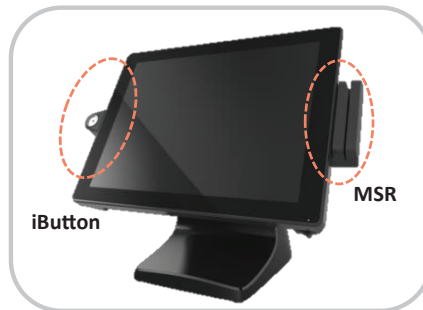

USB ports on both sides of the screen for peripheral connections



Optional VFD, 9.7" customer display

Mechanical Layout / Drawing

Unit: mm

